



FloorArtz
Special Effect Paint



FLOORARTZ SPECIAL EFFECT

Special Effect Collection



DURABLE



DECORATIVE



DISTINCTIVE

System Type



Roller / Trowel System



Smooth decorative finish



Applied by roller or trowel



FloorArtz Floating Quartz



Broadcast System



Textured decorative finish



Broadcast flake



Epoxy Flake Floor Coating +
EA4 Finish or
Floorshield SF Epoxy Finish



**Container artwork for illustration purpose only.*

FloorArtz Floating Quartz



A three-component epoxy self-levelling system with decorative colour quartz that floats on the surface finish. It can be applied on concrete with an appropriate primer or directly onto various types of tile surfaces.

FloorArtz Floating Quartz



(Available in 5KG & 20KG)

**Container artwork for illustration purpose only.*



**Aesthetic flooring
with durable
performance**



**Excellent resistance
against detergents &
cleaning agents**



**Superior water
resistance with
colour stability**




**Inhibits dust
formation**



Low odour

Colour Selection

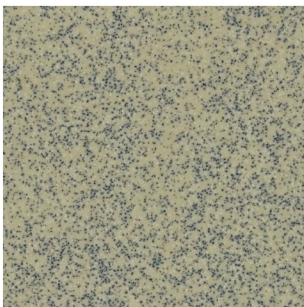


Limestone Beige

FQZ 101



Arctic Stone Grey

FQZ 102

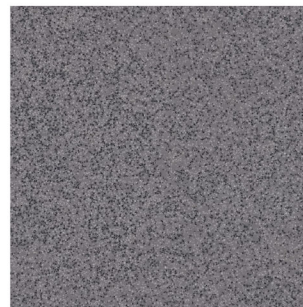


Volcanic Grey

FQZ 103




Regent Grey

FQZ 104

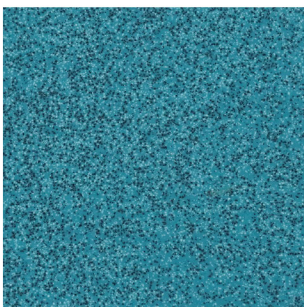

Reef Stone Blue

FQZ 105

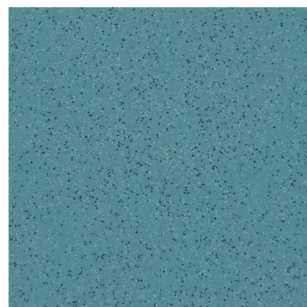


Emerald Blue

FQZ 106



Rainforest Green

FQZ 107

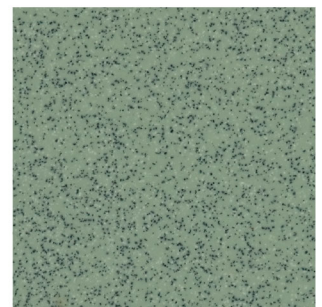


Granite Mint Green

FQZ 108

All colours shown are close to the actual Nippon Paint colours as modern printing techniques permit. Depending on your choice of finishing, the visual appearance of each colour may vary.

Tile Surfaces:

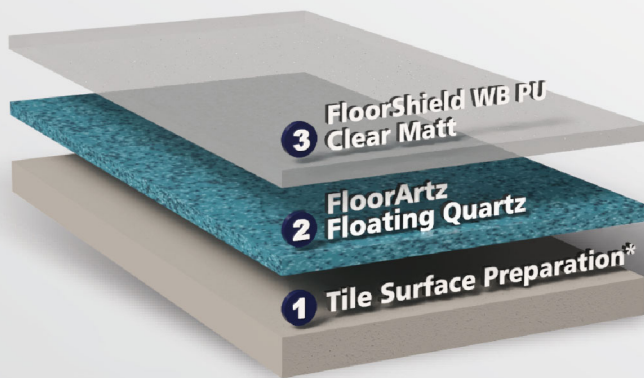


Apply 1-2 additional coats of WB PU Clear Matt for a matt finish or better performance.

Recommendation:

Add 20% Non-Skid Sand 103 (Fine) to the first coat of FloorShield WB PU Clear Matt to achieve better anti-slip finish.

*Surface Preparation refer to page 14

Concrete Surfaces:

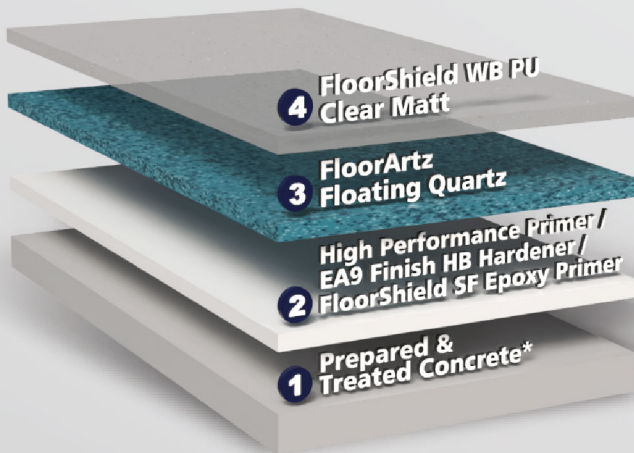

Apply 1-2 additional coats of WB PU Clear Matt for a matt finish or better performance.

Recommendation:

Add 20% Non-Skid Sand 103 (Fine) to the first coat of FloorShield WB PU Clear Matt to achieve better anti-slip finish.

*Surface Preparation refer to page 14

Technical Data:

Touch Dry : 12 hours

Walk on Time : 24 hours

Thickness : 1.50 - 2.00 mm

Cleaning Solvent : Nippon Paint SA-65 Thinner/
2K Thinner 01


Hard Dry : 24 hours

Consumption : 2.0 - 3.0 kg/m²

Pot Life : 20 - 30 minutes

Shelf Life : 24 months (tightly sealed & properly stored)

Tile Surfaces:

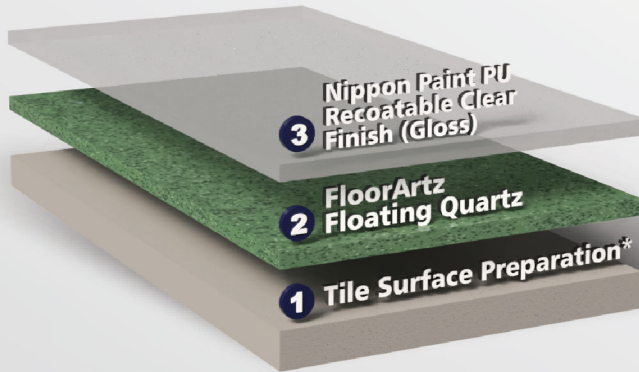


Apply 1-2 additional coats of Nippon Paint PU Recoatable Finish (Gloss) for better performance.

Recommendation:

Add 20% Non-Skid Sand 103 (Fine) to the 1st coat of Nippon Paint PU Recoatable Clear Finish to achieve better anti-slip finish. It is recommended to do 10% dilution with PU Recoatable Thinner when applying PU Recoatable Clear Finish (Gloss).

*Surface Preparation refer to page 14

Concrete Surfaces:

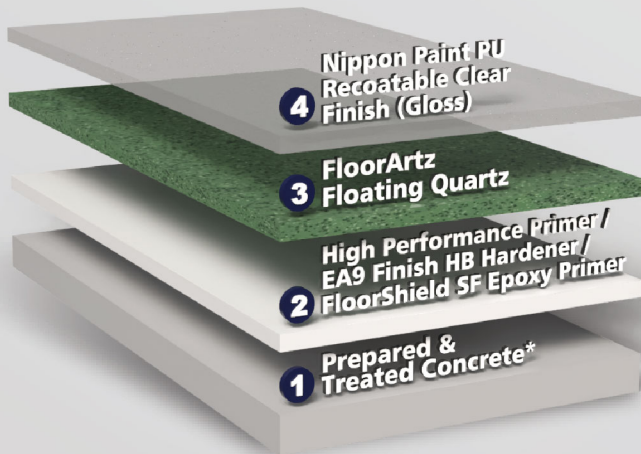

Apply 1-2 additional coats of Nippon Paint PU Recoatable Finish (Gloss) for better performance.

Recommendation:


Add 20% Non-Skid Sand 103 (Fine) to the 1st coat of Nippon Paint PU Recoatable Clear Finish to achieve better anti-slip finish. It is recommended to do 10% dilution with PU Recoatable Thinner when applying PU Recoatable Clear Finish (Gloss).

*Surface Preparation refer to page 14

Applicable Areas



Bathroom **applicable on both dry & wet area*

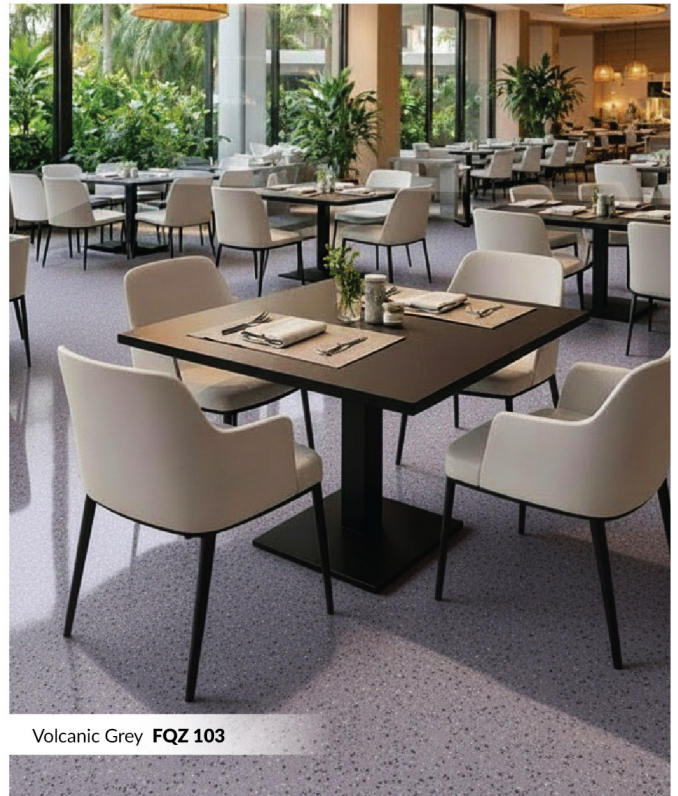

Commercial Area



Storeroom



Hotel Lobby



Epoxy Flake Floor Coating

A two-component epoxy system, enriched with a wide range of decorative flake patterns to deliver a strong, stylish, and long-lasting finish, on ceramic, porcelain and homogeneous tiles.

Epoxy Flake Floor Coating



Solvent Based (Available in 5L)



Solvent Free (Available in 8KG)
*Container artwork for illustration purpose only.

Choose your system. Pair with your desired flake colour.
Decorative flake available in 8KG packaging.



Wide range of flake pattern



Good hardness & abrasion resistant



Resistant to detergent

Flakes Colour



Light Grey



White Light Grey



Medium Grey



Dark Grey

EA4 Finish



Good resistance to
abrasion & mechanical
damage



Excellent on
correctly prepared
& primed surfaces




Dry service
temperature
up to 100°C

Colour Selection



Ivory BS 4052



Ash Grey BS 9093



Yellow ▲ 0668



Orange ▲ 0823



Indian Red ▲ 0882



Executive Grey 0104



Misty Grey 1457




Calm Green BS 6070



Evergreen 1461



Lime Green 1459



Black BS 9103



Bright Blue 0632




Blue 0139



Dark Green 1458



Fern Green 1460



White BS 9102

▲ Special Colour

All colours shown are close to the actual Nippon Paint colours as modern printing techniques permit. Depending on your choice of finishing, the visual appearance of each colour may vary.

FloorShield SF Epoxy Finish



*Container artwork for illustration purpose only.



Excellent abrasion
resistance



Excellent chemical
resistance



Customizable
floor systems



High gloss finishing



Available in
various colours

Colour Selection



Ivory 4052



Ash Grey 9093



Lining Yellow 359



Light Pink RAL 3015



Indian Red 0882



Evergreen 1461



Fern Green 1460



Dark Green 1458



Fresh Blue NPIU 2041



Bright Blue 0632



Light Grey ▲ RAL 7035




Misty Grey 1457



Executive Grey 0104



Black BS 9103




White BS 9102


▲ Special Colour

All colours shown are close to the actual Nippon Paint colours as modern printing techniques permit. Depending on your choice of finishing, the visual appearance of each colour may vary.

Epoxy Flake Floor Coating (Solvent Based):

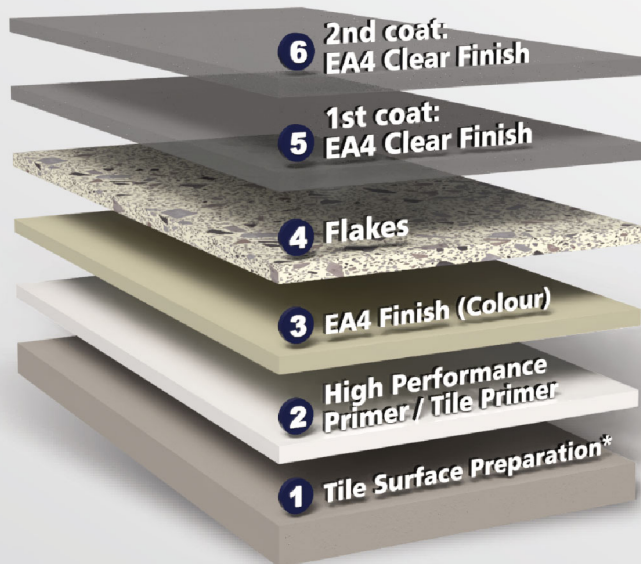

After 24 hours, light sanding with 300-600 mesh sandpaper is required to get smooth finish.




Broadcast the flake over the surface when it is still wet.

*Surface Preparation refer to page 14

Epoxy Flake Floor Coating (Solvent Free):



After 24 hours, light sanding with 300-600 mesh sandpaper is required to get smooth finish.



Broadcast the flake over the surface when it is still wet.

*Surface Preparation refer to page 14

Applicable Areas



Light Grey

Bathroom **applicable on both dry & wet area*



Dark Grey

Study Room



White Light Grey

Backyard (Interior)



Medium Grey

Living Room

When to use Solvent-Based System or Solvent-Free System

*Container artwork for illustration purpose only.



INTERIOR REQUIREMENT	SOLVENT-BASED SYSTEM	SOLVENT-FREE SYSTEM
Best Positioning	Interior Practical System	Interior Premium System
Low Odour Requirement	Not preferred	Best choice
Area Duty Classification	Light / Medium Area	Light / Medium / Heavy Area
Durability	Good	Best choice
Chemical & Detergent Resistance	YES	YES
	SOLVENT-BASED SYSTEM A practical and reliable flooring solution for general interior applications where ease of application and performance are key.	SOLVENT-FREE SYSTEM A premium, low-odour flooring system with excellent durability, suitable for both modern interior spaces and heavy-duty industrial applications.

Choose the Right Flooring Solution

Two Trusted Options. One Perfect Choice for Your Space.

FloorArtz Floating Quartz

Roller / Trowel System Application



Durable & high performance finish



Good resistance to cleaning detergent

Epoxy Flake Floor Coating

Broadcast System Application



Decorative & textured finish



Good resistance to cleaning detergent

Tile & Concrete Application Method

ideal for
FloorArtz Floating Quartz



CONCRETE APPLICATION METHOD:

- 1 Substrate moisture check required: <4%
- 2 Surface preparation: shot blasting, scarifying or mechanical grinding
- 3 Crack & hole repair
- 4 Removal of dust, oil, grease & other contaminants
- 5 Component mixing
- 6 Flooring system application
- 7 Solvent cleaning

ideal for
FloorArtz Floating Quartz & Epoxy Flake Floor Coating



TILE APPLICATION METHOD:

- 1 Surface preparation: dry, clean & dust-free
- 2 Crack & hole repair
- 3 Removal of dust, oil, grease & other contaminants
- 4 Component mixing
- 5 Flooring system application
- 6 Solvent cleaning

FloorArtz Floating Quartz Launching Campaign



Material Code	Product Name	Bar Code	Pack Size	Dealer Invoice (incl SST)	BUY	FOC	Campaign Net (excl PP & PT)	Point
CCQBY39F2	FloorArtz Floating Quartz Base (Part A)		5 KG	RM 221.00	10	4	RM 157.86	5
9F3XK5	FloorArtz Floating Quartz (Part B)							
9F4X3K	FloorArtz Floating Quartz (Part C)							

Material Code	Product Name	Bar Code	Pack Size	Dealer Invoice (incl SST)	BUY	FOC	Campaign Net (excl PP & PT)	Point
CCQB5D9F2	FloorArtz Floating Quartz Base (Part A)		20 KG	RM 704.00	10	4	RM 502.86	8
9F3X2Z	FloorArtz Floating Quartz (Part B)							
9F4X1Z	FloorArtz Floating Quartz (Part C)							

Epoxy Flake Floor Coating Launching Campaign



Material Code	Product Name	Bar Code	Pack Size	Dealer Invoice (incl SST)	BUY	FOC	Campaign Net (excl PP & PT)
TR2564	Epoxy Flake Floor Coating (Medium Grey)		8KG	RM 260.00	10	1	RM 236.36
TR2565	Epoxy Flake Floor Coating (Light Grey)		8KG	RM 260.00	10	1	RM 236.36
TR2566	Epoxy Flake Floor Coating (Dark Grey)		8KG	RM 260.00	10	1	RM 236.36
TR2568	Epoxy Flake Floor Coating (White Light Grey)		8KG	RM 260.00	10	1	RM 236.36

Campaign Period: 15th September 2026 - 31st October 2026
Last Day to Order: 24th October 2026
Last Day to Deliver: 31st October 2026

***Terms & Condition:**

- 1. This offer will remain valid only throughout the campaign period & will supersede any of current ad-hoc campaigns.
- 2. Project sales and special quoted price are not entitled to the above offer.
- 3. Nippon Paint reserved the right to change the campaign details without prior notice.

Empowering you to sell our products effectively with the right tools.

