



Malaysia's No.1 Choice



**NIPPON
PAINT**

ROOF COLLECTION


THE BEST ROOF PAINT
For Your Most Beautiful Home



1
ASIA'S
NO. 1
PAINT
BRAND



Top30 2024 Paint Manufacturers in Asia Pacific,
Source: Asia Pacific Coatings Journal.

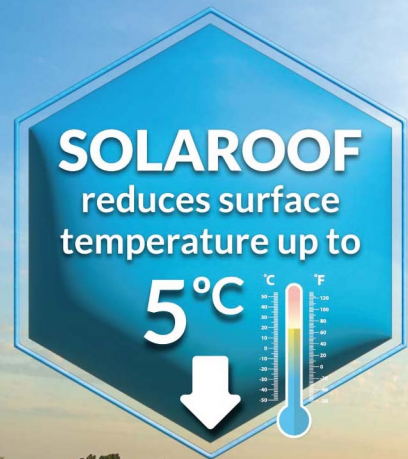

Solarroof

Experience a cooler, more energy-efficient home with our UV-resistant roofing solution. Enjoy reduced heat transfer and a more comfortable living space.



Solareflect Technology
Reduces surface temperature up to 5°C.



Keep Clean Technology
Excellent dirt pick up and alkaline resistance.



Sunblock Technology
Anti-fade properties for a long lasting colours.



10 Years of Protection



Roof Coating

Experience long-lasting protection with our eco-friendly roof coating, specially designed for roof surfaces.



Sunblock Technology
Anti-fade properties for a long lasting colours.



Colour Care Technology
Provide the long lasting colours.



Micro Block Technology
Excellent fungus and algae resistance.



7 Years of Protection


Discover Your PERFECT ROOF COLOUR



White 145



Brick Red 645



Spice Blaze 2070



Mist Green 9631



Window Grey RAL 7040



Thunderball Red 113



Orange 650



Plus Green 651



Metropolis 9639



Red Wall 9605



Leather 658



Palace Dome 672



Shadow Gray 670



Rich Red 9589



Natural Peach 659



Wira Blue 647



Misty Forest 9619



Istana Maroon 657



Terra Cotta 407



Royale Blue 9618



Ravenne 9624



Coal Gray 9621



Double Shots 9650



Blue Mountain 9627



Eclipse 9553

Premium Colours

Only available for NippoSeal Flex 200 Fibre Pro and NippoSeal Flex 200

All colours shown are as close to the actual Nippon Paint colours as modern printing techniques permit. Depending on your choice of finishing, the visual appearance of each colour may vary. Accurate colour can only be achieved with Nippon Paint products tinted using Colour Creations Management System (CCMS).

Metal Roof / Cladding /
Spandex Roofing

Concrete
Tile Roof

RC Concrete
Flat Roof

Glazed / Clay /
Ceramic Tile


Galvanised Substrate /
Alloy Coated Metal

ROOF PAINTING GUIDE

The right system for the right roof

METAL ROOF / CLADDING / METAL SPANDEX ROOF

	EXCELLENT PERFORMANCE	HIGH PERFORMANCE	GOOD PERFORMANCE	APPLICATION METHOD
	 SOLVENT-BASED	 SOLVENT-BASED	 WATER-BASED	 SOLVENT-BASED
PRIMER	 8048 ZINC PHOSPHATE PRIMER QD Low Gloss 1 coat	 8048 ZINC PHOSPHATE PRIMER QD Low Gloss 1 coat	 HYDRO WOOD & METAL PRIMER Matt 1 coat	 ZINC PHOSPHATE PRIMER FD Low Gloss 1 coat
INTERMEDIATE	 8048 OFF WHITE Semi Gloss 1 coat	By:  Roller or  Spray 1. For easier application and better finishing, it is advisable to apply by Air-less Spray. 2. For roller application, recommended coats are needed to achieve recommended dry film thickness.		
TOP COAT	 PU RECOATABLE FINISH Gloss 2 coats	 PUR LITE FINISH Gloss 2 coats	 SOLAROOF Gloss 2 coats	 ROOF COATING Gloss 2 coats
	 PROTECTIVE FINISH FD High Gloss 2 coats			NOTE: Please refer to the detailed product specifications in the TDS on our website.

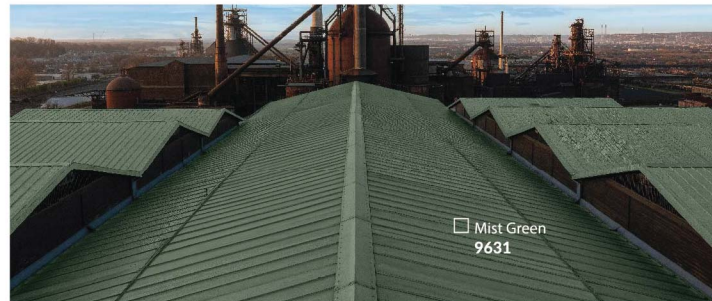

CONCRETE TILE ROOF

	EXCELLENT PERFORMANCE	HIGH PERFORMANCE	GOOD PERFORMANCE	APPLICATION METHOD
	 SOLVENT-BASED	 SOLVENT-BASED	 SOLVENT-BASED	
PRIMER	 EA9 FINISH HB Low Gloss 1 coat	 ACRYLIC 5170 WALL SEALER Matt 1 coat	 ACRYLIC 5170 WALL SEALER Matt 1 coat	1. Remove all dirt and dust by water jetting. 2. Allow surfaces to dry out thoroughly. 3. Ensure that the surfaces are free from loose dirt, dust, grease, oil and other contaminants. All unstable paint film must also be removed.
TOP COAT	 PUR LITE FINISH Gloss 2 coats	 PU RECOATABLE FINISH Gloss 2 coats	 ACRYLIC FINISH TOPCOAT Gloss / Soft Matt 2 coats	 SOLAROOF Gloss 2 coats
	 ROOF COATING Gloss 2 coats			By:  Roller or  Spray 1. For easier application and better finishing, it is advisable to apply by Air-less Spray. 2. For roller application, recommended coats are needed to achieve recommended dry film thickness.
	NOTE: Please refer to the detailed product specifications in the TDS on our website.			


Protecting the Crown of

Your Most Beautiful Home,











The Nippon Paint Roof Collection offers a complete system of expertly formulated primers, sealers, and topcoats that work together to provide specialized protection, ensuring your roof has lasting strength and a long-lasting appearance.



RC CONCRETE FLAT ROOF (REINFORCEMENT)

	EXCELLENT PERFORMANCE	GOOD PERFORMANCE	APPLICATION METHOD
	 WATER-BASED	 WATER-BASED	
PRIMER	 NIPPOSEAL FLEX 200 FIBRE PRO Matt 1 coat	 NIPPOSEAL FLEX 200 Matt 1 coat	1. Remove all dirt and dust by water jetting. 2. Allow surfaces to dry out thoroughly. 3. Ensure that the surfaces are free from loose dirt, dust, grease, oil and other contaminants. All unstable paint film must also be removed.
INTERMEDIATE	 NIPPOSEAL FLEX 200 FIBRE PRO Matt 1 coat	 NIPPOSEAL FLEX 200 Matt 1 coat	By:  Roller 1. For roller application, recommended coats are needed to achieve recommended dry film thickness.
FIBRE REINFORCEMENT			Remark: 1. Strictly spray is not applicable for NippoSeal Flex 200 Fibre Pro and NippoSeal Flex 200. 2. Apply LM Mat before Top Coat for fibre reinforcement.
TOP COAT	 NIPPOSEAL FLEX 200 FIBRE PRO Matt 1 coat	 NIPPOSEAL FLEX 200 Matt 1 coat	NOTE: Please refer to the detailed product specifications in the TDS on our website.

GLAZED / CLAY / CERAMIC TILE & GALVANISED SUBSTRATE / ALLOY COATED METAL

	GLAZED / CLAY / CERAMIC TILE	GALVANISED SUBSTRATE / ALLOY COATED METAL	APPLICATION METHOD
	 SOLVENT-BASED	 SOLVENT-BASED	
PRIMER	 EA9 FINISH HB Low Gloss 1 coat	 EA9 FINISH HB Low Gloss 1 coat	1. Remove all dirt and dust by water jetting. 2. Allow surfaces to dry out thoroughly. 3. Ensure that the surfaces are free from loose dirt, dust, grease, oil and other contaminants. All unstable paint film must also be removed.
INTERMEDIATE	 EA9 FINISH HB Low Gloss 1 coat		By:  Roller or  Spray 1. For easier application and better finishing, it is advisable to apply by Air-less Spray. 2. For roller application, recommended coats are needed to achieve recommended dry film thickness.
TOP COAT	 PUR LITE FINISH Gloss 2 coats	 PU RECOATABLE FINISH Gloss 2 coats	 PU RECOATABLE FINISH Gloss 2 coats
	NOTE: Please refer to the detailed product specifications in the TDS on our website.		

ROOF PRODUCT SELECTOR CHART

Top Coat



Solarroof



Roof Coating



PU Recoatale
Finish



PUR Lite Finish



Acrylic Finish
Topcoat



Protective
Finish FD



NippoSEAL
Flex 200 Fibre Pro



NippoSEAL
Flex 200

Product Type

Water-based

Water-based

Solvent-based

Solvent-based

Solvent-based

Solvent-based

Water-based

Water-based

Product Highlights

Roof protection with heat resistance, reduces surface temperatures by to 5°C

Long lasting of roof protection

Excellent durability with fungus resistance, weathering resistance, colour and gloss retention

Good durability with weathering resistance, colour and gloss retention

Long-lasting of roof protection with good weathering and alkaline resistance

Long-lasting of roof protection with good weathering resistance

Excellent UV resistant fibre reinforced elastomeric acrylic coating

Good UV resistant elastomeric acrylic waterproofing

Finishing

Finishing

Gloss

Gloss

Gloss

Gloss

Gloss / Soft Matt

High Gloss

Matt

Matt

Substrate Suitability



Excellent



Good

Metal / Cladding / Metal Spandex Roof



Concrete Tile Roof



RC Concrete Flat Roof



Glazed / Clay / Ceramic Tile



Galvanised Substrate / Alloy Coated Metal



Functional Benefits

Solareflect Technology



Sunblock Technology



Keep Clean Technology



Microblock Technology



Hi-Build Technology



Colour Care Technology



Recommended Primer

	Metal Roof / Cladding / Metal Spandex Roof	Concrete Tile Roof	RC Concrete Flat Roof (Reinforcement)	Glazed / Clay / Ceramic Tile	Galvanised Substrate / Alloy Coated Metal
Water-based	 Hydro Wood & Metal Primer	N/A	 NippoSEAL Flex 200 Fibre Pro -or-  NippoSEAL Flex 200	N/A	N/A
Solvent-based	 8048 Zinc Phosphate Primer QD -or-  Zinc Phosphate Primer	 EA9 Finish HB -or-  Acrylic 5170 Wall Sealer	N/A	 EA9 Finish HB	 EA9 Finish HB

NOTE: Please refer to the correct primer application based on the right coating system. For more product information, refer to the Technical Data Sheet on our website or contact our customer care line.



Nippon Paint (Malaysia) Sdn. Bhd. (196701000578)
Lot I-17, Taman Perindustrian Subang Utama, Jalan SU 4,
40300 Shah Alam, Selangor Darul Ehsan, Malaysia.
☎ 1-800-88-2663 ✉ customercare@nipponpaint.com.my
📘 facebook.com/nipponpaintmalaysia
🌐 nipponpaint.com.my | professional.nipponpaint.com.my



Please recycle this colour card
or keep it for future use.
Sila kitar semula kad warna ini atau
simpan untuk kegunaan masa depan.